



Galaxy 3L

Business continuity made simple
with optimized investment

250-600 kVA
400 V



se.com/ups

Life Is On

Schneider
Electric

Business continuity made simple with optimized investment

The Schneider Electric Galaxy 3L is a simple to configure, use, and service 250-600 kVA (400 V) 3-phase UPS that delivers high availability and predictability to medium and large data centers, commercial buildings, and light industrial applications.

Its fault-tolerant design streamlines installation and service, its compact footprint saves valuable real estate, and its up to 96% efficiency brings predictability to your utility costs. With its exceptional combination of competitive specifications and highly available parallel and redundant designs, the EcoStruxure™ connected Galaxy 3L is the simple choice for business continuity in your data center, at your manufacturing site, or in your electrical room. Start-up service is included to optimize your system's performance, quality, and safety.

Typical applications

- Data centers
- Commercial buildings
- Manufacturing facilities
- Finance
- Government
- Healthcare
- Transportation



Simple

Simplify every step of the deployment process with the UPS that is easy to select, easy to configure, easy to start up, and easy to use and service.



Competitive specifications

Enjoy high efficiency and protection against harsh environments with robust electrical specifications and ruggedizing features.



Optimized investment

Tailor the UPS to your site's needs to reduce your capital expenditures and improve the predictability of your utility costs.



Robust and flexible design

Fault-tolerance, coupled with your choice of redundant configurations, keeps your site resilient.



Compact footprint

High density makes more room for your revenue-generating equipment.



EcoStruxure-connected solution

Anytime, anywhere monitoring and service support via smartphone.

Robust, versatile, and optimized investment

Robust design and versatile architecture


- Fault-tolerant design enhances availability
- Wide battery voltage window for easy compatibility with third-party battery solutions
- Easily adapts to your site requirements:
 - Parallel up to 5 UPSs for capacity or 5+1 UPSs for redundancy
 - Includes support for 4+4 redundant configurations
- The included fortifying features protect your UPS in data centers, manufacturing, industrial, or commercial buildings:
 - Embedded dust filter
 - IP20 protection
 - Conformal coating
 - Wide input voltage range
 - Rodent protection
 - Upgrade your UPS to protect against condensation and comply with NFS61940 by installing the optional IP31 kit

Compact design and optimized start-up investment

- Compact and lightweight form factor
- Up to 96% efficiency in double conversion mode
- 1+1 redundant UPSs can share a common battery bank, reducing battery costs
- Only pay for the options you need with upgrade kits to enhance the resilience of the UPS


Achieve high availability and resiliency with fault tolerant design and flexible redundancy schemes that support your ideal system architecture

Fault-tolerant design




The design is a fault-tolerant architecture. In case a power block becomes inoperable, the load will continue to be supported by the remaining power blocks, provided that the load is below the capacity of the functional power blocks in the system.

Increased capacity with parallel installation

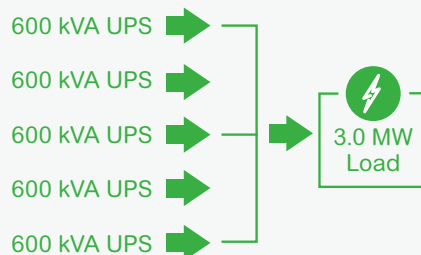

You can install up to 5 UPSs in parallel for capacity.

Higher resilience with N+N isolated bus installation

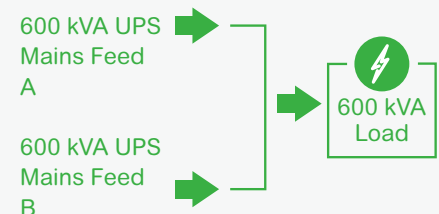

You can increase availability by installing two isolated busses (UPSs) to receive power from two independent power sources. The UPSs are synchronized automatically, making installation and set-up easy and resilient.

Simple to install, operate, and service

Simple to install and start up

- Streamlined installation with standard top cable entry
- Smart Test mode optimizes site acceptance testing costs, saves time, and ensures high load protection by validating the UPS performance before you connect your load, without requiring a load bank
- Aesthetic design blends well into your installation environment
- Simple on-site start-up with Schneider Electric Services Representatives

Simple to configure and operate

- Simple to configure with the user-friendly 7-inch touchscreen display interface
- With the included Network Management Card, you can:
 - Monitor UPS status remotely through a web interface
 - Monitor and manage the UPS status and performance through EcoStruxure IT's cloud-based and on-premise software suites, or through SNMP integration to the Network Management System of your choice, bringing you peace of mind
 - Manage buildings through the BACnet protocol for integration with Building Management Systems (BMSs)


Simple to maintain and service

- Quickly and easily replace the dust filter, conveniently located behind the front door
- Schneider Electric service team makes service easy and improves uptime with proper maintenance of your UPS and batteries

Speed up deployment time and reduce start-up costs by using the Smart Test mode before connecting your critical building or facility load

Smart Test mode enables the service engineer to test the UPS with full capacity current flow through important components and converters without using a large system input current, and without needing a load bank connected to the system or other system modifications.

- A simple method to test the UPS at full power
- Can be conducted after service, repair, upgrade, or commissioning of UPS installation to verify system is properly installed
- Reduce risk to load and improve product quality
- Significant cost, time, and power savings!

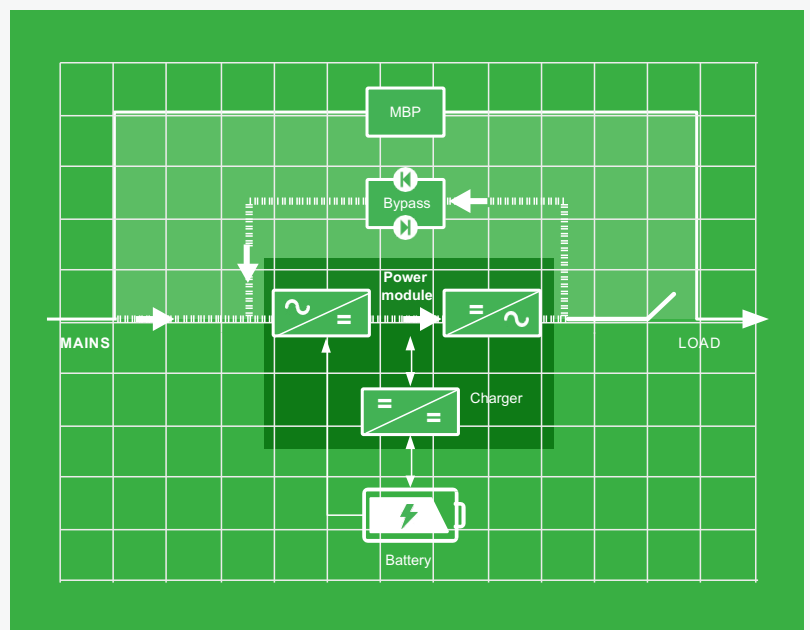

Options and accessories

Galaxy 3L is available with a full range of options and accessories, making it simple to integrate into different environments.

Options



Classic battery cabinets



Empty auxiliary cabinet




Battery breaker box




Maintenance bypass panel

Accessories

- Parallel communication kit
- Load Bus Synchronization (LBS) Kit
- Cold start kit
- Battery breaker kit
- Bottom cable entry cabinet
- IP31 kit

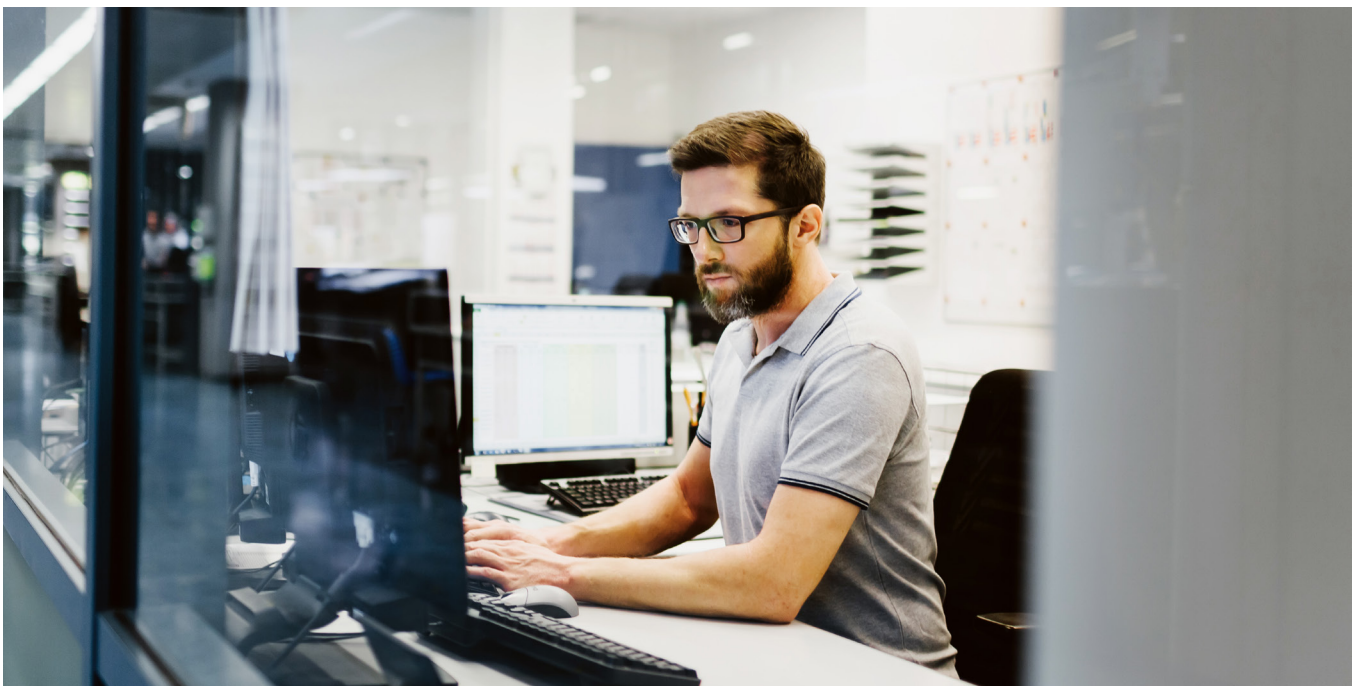

UPS remote monitoring and maintenance solution




EcoStruxure IT Expert UPS digital management platform

IT Expert gives you one view to proactively monitor and manage your UPS, wherever you are. Gain more than alarms, with full visibility, predictive management, and data-driven recommendations to mitigate security and failure risks for local edge, distributed IT, and data center applications. IT Expert cloud gateway is used to connect the UPS and the IT Expert platform.

IT Expert key features:

- Real-time monitoring
- Multiple notification methods – Tel, SMS, app push, Web pop-up
- Mobile app
- Overview page
- Report
- No networking or VPN required; manage devices anytime and anywhere
- No maintenance required

Fast deployment via IT Expert 4G gateway:

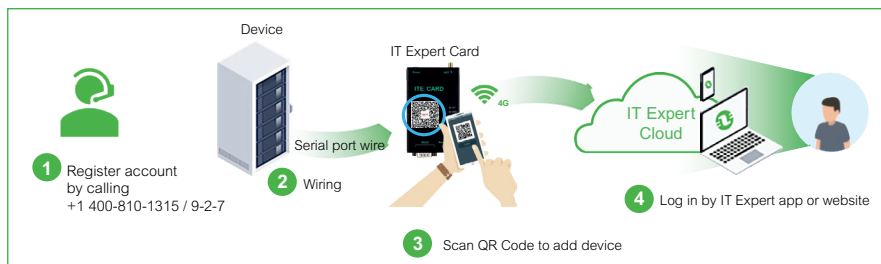


EcoStruxure Asset Advisor remote expert service

Effortlessly manage your IT systems by letting us monitor and detect issues before they happen. Choose between two all-digital, always-on options.

Asset Advisor Services:

- 24/7 expert on-line monitoring
- Event analysis and suggested actions
- Proactive service dispatch
- Monthly consulting report
- Asset Advisor expert call-in line

How to implement:

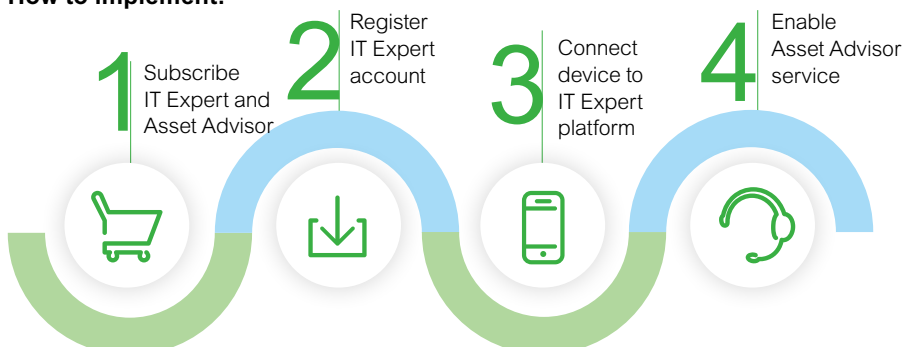

Comprehensive on-site services

Start-up service: included with UPS

- Commission the installation in accordance with manufacturer's recommendations. Ensure optimal system performance from Day 1

Schneider Electric-certified installation services

- Expert configuration of your equipment for optimal performance and reliability

Maintenance services

- Ensure proper care of your mission-critical applications
- Preventive maintenance and response time upgrades, where available

Flexible service plans/ on-site extended warranty

- Hassle-free system maintenance
- Improve uptime at a predictable cost

Technical specifications

Rated Power (kVA/kW)*	250 kVA/225 kW	300 kVA/270 kW	400 kVA/360 kW	500 kVA/450 kW	600 kVA/540 kW
Input					
Input voltage (V)	380/400/415 V (3-phase + Neutral + PE)				
Frequency (Hz)	40–70 Hz				
Input power factor	>0.99				
THDI	<3%				
Input voltage range	323–477V				
Dual mains input	Yes (default: single mains input)				
Output					
Parallel	Up to 5 UPSs for capacity (or 5 + 1 for redundancy)				
Nominal output voltage (V)	380/400/415 V				
Efficiency: Double conversion mode	Up to 96%				
ECO mode	99%				
Overload capacity in normal operation	150% for 1 minute, 125% for 10 minutes, 105% continuous				
Output voltage tolerance	+/-1%				
Load Power Factor compatibility	From 0.5 leading to 0.5 lagging				
Communication and management					
Communication interface	RS485, dry contacts, Ethernet (SNMP, Modbus TCP/IP, BACnet)				
Control panel	7-inch touchscreen LCD, status, and display console				
Weights and dimensions					
UPS, unpackaged/dimensions (H × W × D)	1970 x 600 x 850 mm			1970 x 1000 x 850 mm	
UPS, unpackaged weight	425 kg	465 kg	560 kg	640 kg	720 kg
Regulatory					
Safety	IEC/EN 62040-1				
EMC	IEC/EN 62040-2				
Performance	IEC/EN 62040-3				
Marking	CE, TLC				
Battery type					
Battery type	VRLA				
Number of batteries	36–50				
Charging power in % of output power (selectable)	26%			24%	
Environmental					
Relative humidity	0 to 95% non-condensing				
Operating elevation	0 to 1500 m without derating				
Audible noise at 1m from unit	70db			72db	
Protection class	IP20 (IP31 with optional kit)				

* kVA/kW at 30° C; power factor = 0.9 at 40° C



Life is On. Schneider Electric.

Life Is On



To learn more about the Galaxy 3L 3-Phase UPS, EcoStruxure IT cloud-based DCIM, and EcoStruxure Asset Advisor 24x7 Digital Monitoring Services, contact your Schneider Electric representative or visit se.com/ups.

About Schneider Electric At Schneider Electric, we believe access to energy and digital is a basic human right. We empower all to make the most of their energy and resources, ensuring Life Is On everywhere, for everyone, at every moment. We provide energy and automation digital solutions for efficiency and sustainability. We combine world-leading energy technologies, real-time automation, software and services into integrated solutions for Homes, Buildings, Data Centers, Infrastructure and Industries. We are committed to unleash the infinite possibilities of an open, global, innovative community that is passionate about our Meaningful Purpose, Inclusive and Empowered values.

Schneider Electric SE
11/F, Kerry Centre
683 King's Road
Quarry Bay
Hong Kong
www.se.com

©2023 Schneider Electric. All Rights Reserved. Life Is On Schneider Electric is a trademark and the property of Schneider Electric SE, its subsidiaries and affiliated companies. All other trademarks are the property of their respective owners.
998-22744253